



## KIT CONTENTS

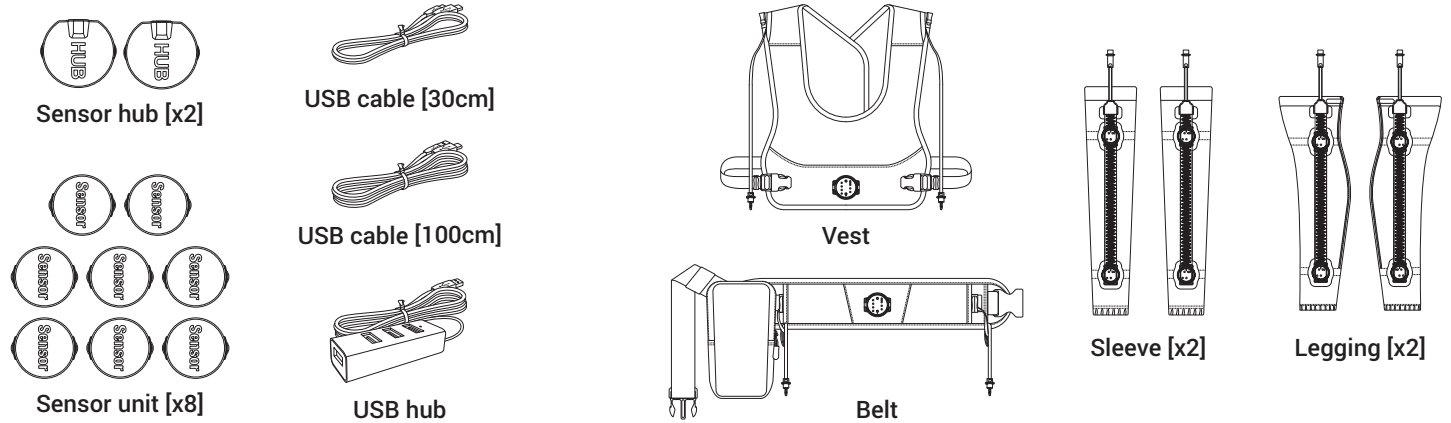


## ASSEMBLY

Insert eight sensors to dockings on sleeves and leggings

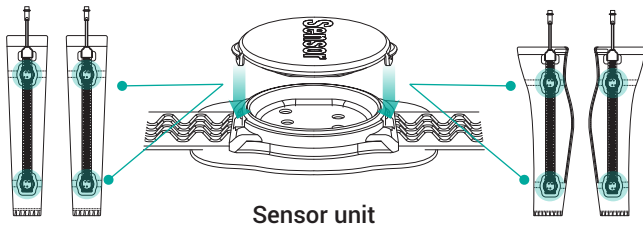


Insert two sensor hubs to vest and belt dockings

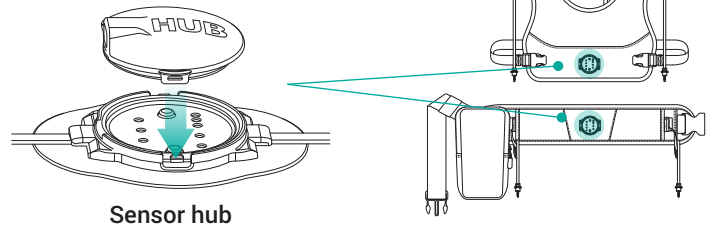


## DRESS UP

- 1 Put on legging, then pull the legging up above knees.  
 ※ For each legging, the zipper should be on the back of the leg and sensor on the side.
- 2 Put sleeve, then pull the sleeve up above the elbow.  
 ※ The lower sensor should be at the location when wearing a watch and the upper sensor should align with the straight line from the lower sensor to shoulder connector
- 3 Put on the vest, then connect the sleeve connectors with vest connectors.
- 4 Put on the belt, then connect legging connectors with belt connectors.
- 5 Put the USB hub to the belt packet, then connect the 30cm and 100 cm USB wire with the USB hub, then pull out the connectors of USB hub and USB wires from the upper hole.
- 6 Connect the 30cm wire to belt Sensor Hub and then connect the 100cm wire to the vest Sensor Hub.
- 7 Plug in a 3-4 meter USB extension wire to the USB Hub and connect to the computer USB port to complete the connection.

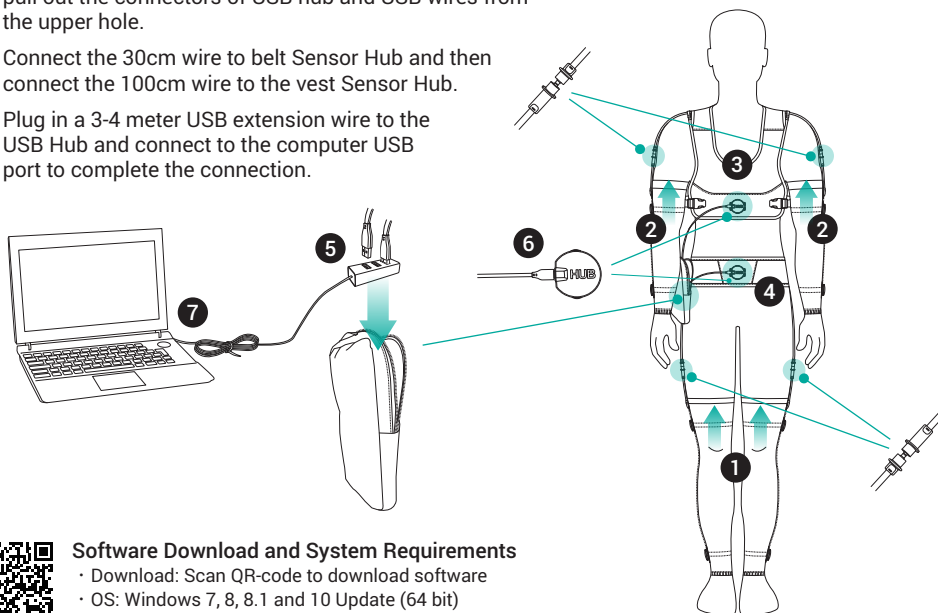

### ⚠ Check whether the Sensor fitting is correct

When standing at attention, the sensors on both arms and feet should be in the same vertical line, and the position should be higher than the four joints.

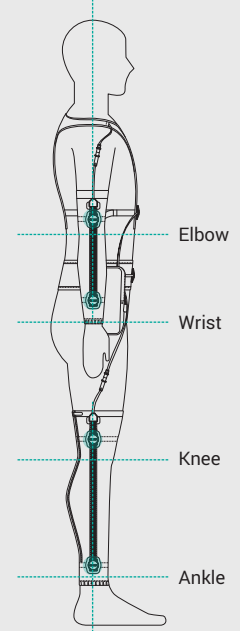

### Software Download and System Requirements

- Download: Scan QR-code to download software
- OS: Windows 7, 8, 8.1 and 10 Update (64 bit)
- Memory: Minimum 4GB RAM